
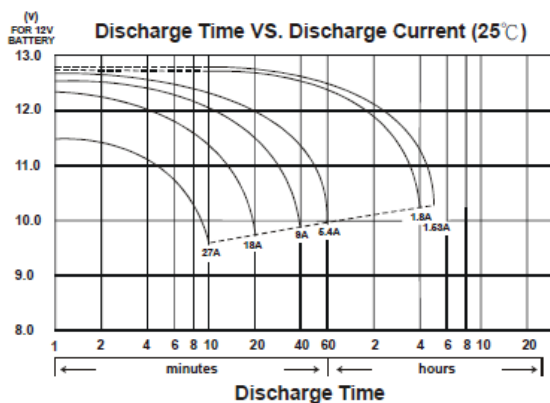


SHR250

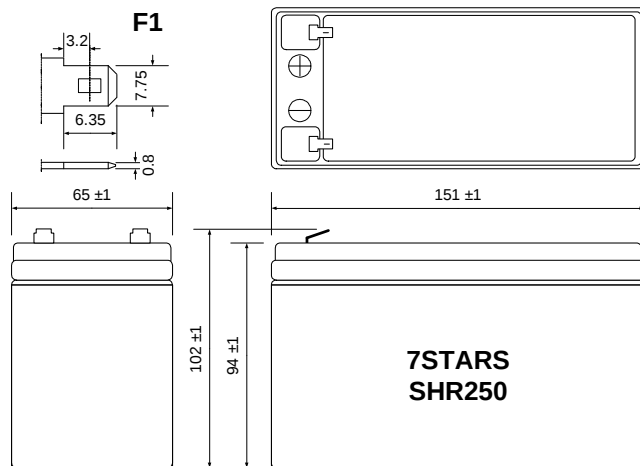

SPECIFICATION

Nominal Voltage (V)	12V
Nominal Capacity	
HR – rating	(9.0Ah)
3C	4.1Ah
1C	5.9Ah
5 hours (1.63A)	8.2Ah
Weight	2.72kg
Internal Resistance	13.6mΩ@1kHz
Maximum Discharge Current for 5 sec.	135A
Operating Temperature Range	
Charge	0°C ÷ 40°C
Discharge	-15°C ÷ 50°C
Storage	-15°C ÷ 40°C
Charge Retention (shelf life) at 20°C	
1 month	92%
3 month	90%
6 month	80%
Charging Methods at 20°C	
Cycle use:	
Charging Voltage	14.4 ÷ 14.7V
Max. Charging Current	2.7A
Standby use	
Float Charging Voltage	13.50 ÷ 13.80V
Life expectancy	
Cycle Use	
100% depth of discharge	225 cycles
80% depth of discharge	250 cycles
50% depth of discharge	750 cycles
Standby Use	10 years
Case Material	ABS
Terminal	F1

Constant Power Discharge Characteristics (25°C) [Watt]

Cut Off	Time										
V	5 min.	10 min.	15 min.	30 min.	1 hour	2 hours	3 hours	4 hours	5 hours	10 hours	20 hours
11.1	364	250	180	123	68.6	46.0	29.5	21.4	18.2	10.5	5.32
10.8	386	268	190	124	69.2	46.4	29.7	21.8	19.0	10.8	5.56
10.5	401	275	199	125	70.1	47.1	30.1	22.1	19.5	11.0	5.68
10.2	423	284	211	126	70.7	47.5	30.4	22.7	19.9	11.2	-
9.90	445	293	221	129	71.9	48.3	30.9	23.2	20.1	-	-
9.60	471	305	227	130	72.1	48.6	31.1	23.5	20.3	-	-